

# CAB492W, CAB482W - Intelligent addressable wall visual alarm device (VAD)



A low-profile, low-current solution to the latest EN 54-23 fire standard.

A stylish, intelligent addressable fire alarm beacon, the visual alarm device (VAD) is for wall mounting and suitable for a variety of applications. It is available in a red body and compatible with a range of bases.

The VAD utilises Eaton's patented lens design that distributes light that efficiently. A weatherproof alternative with an IP66 ingress protection rating, making it suitable for wet and outdoor environments, is available.



## Features and benefits

- Compliant to the latest standards (EN 54-23)
- Ultra-low current consumption
- Coverage switch - 7.5m to 2.5m
- Flash rate switch from 1Hz to 0.5Hz reduces power consumption by up to 50%
- Attractive, discrete design suitable for public places
- Variety of bases provides flexibility as to where the VAD can be installed
- Red (CAB482W) and white (CAB492W) flash options available


**Technical Specifications**

Code	CAB492W / CAB482W
Mounting	Wall
Voltage	19-30V
Current: stand-by	<330µA
Current: operating	12.5-45mA (depending on setting and LED colour)
Mounting height (x)	2.4m
Coverage (y)	Red flash : 7.5m (switchable 2.48m) White flash : 7.5m (switchable 2.5m)
Coverage volume code (w-x-y)	W-2.4-7.5
Flash rate	0.5Hz (Switchable to 1Hz)
Flash colour	Red and white
IP protection	Shallow base: IP33C Deep base: IP65
Operating temperature	Type A = -10°C - 55°C Type B = -25°C - 70°C

**Dimensions**

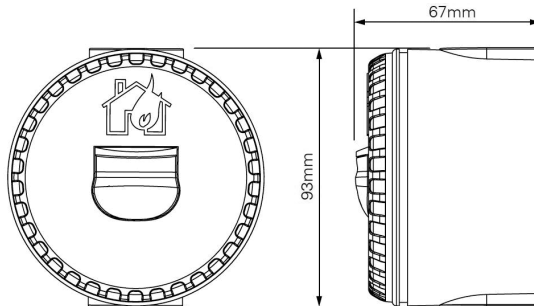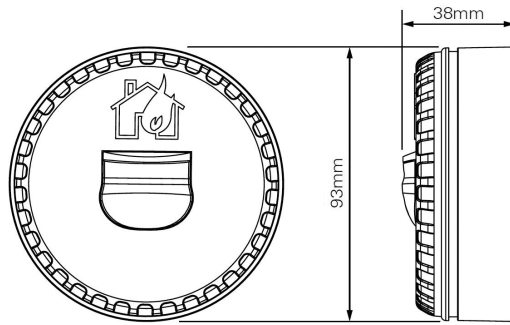

**Standard connections**

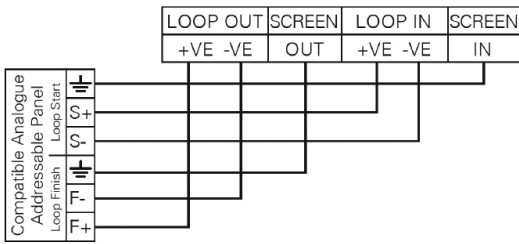

**Warning**  
Do NOT use high voltage testers if ANY equipment is connected to the system.  
Earth screen must be continuous along entire length of the loop.

Description	H (mm)	W (mm)	D (mm)
Wall VAD (Shallow base)	93	93	38
Wall VAD (Deep base)	93	93	67

**Catalogue numbers**

Code	Reference	Description
812033FULL-0209X	SOL-LX-W/WF/R1/S VAD EATON CAB492WS	Wall VAD, red, white flash, shallow base
812034FULL-0210X	SOL-LX-W/WF/R1/WF/D VAD EATON CAB492WD	Wall VAD, red, white flash, deep base
812035FULL-0211X	SOL-LX-W/RF/R1/S VAD EATON CAB482WS	Wall VAD, red, red flash, shallow base
812036FULL-0212X	SOL-LX-W/RF/R1/D VAD EATON CAB482WD	Wall VAD, red flash, deep base